JOHANNESBURG, SOUTH AFRICA

Co.Space Unit C34 Brand Road & Swart Drive President Park AH Midrand 1685 South Africa

BULAWAYO, ZIMBABWE

16A Harare Road Glengary Bulawayo





www.openviewaluminium.co.za

PURPOSE MADE OPTIONS & SIZES ARE AVAILABLE ON ALL PRODUCTS

As a leading supplier of quality aluminium installations, Open View Aluminium & Glass is widely respected for its highly professional approach and steady emphasis on service excellence.


Established in 2010, and due to our customer-oriented focus and dedication to offering a superior service, we have grown steadily over the years.

We develop tailor-made solutions for commercial and industrial projects, as well as residential sites, with a full service offering from consultation and design, through to manufacturing and expert installation.

Whilst most of our clients and projects are in Gauteng Province in South Africa, we have over the years built key relationships across Southern Africa, and often carry out key projects in other countries.

Our workshop in Midrand is the hub of all our operations, and a place of great synergy amongst our management, office staff and our manufacturing and installation teams.

In the first quarter of 2020, we opened our new workshop in Bulawayo to strengthen our footprint in Zimbabwe, which has one of the fastest growing housing markets in the region.

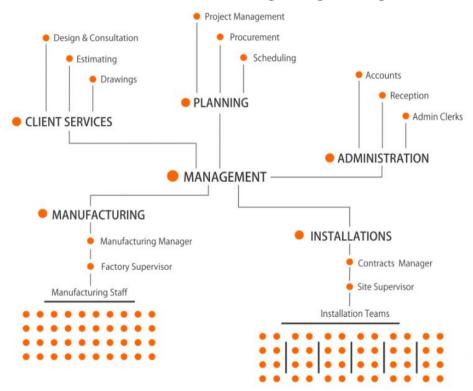

Our Core Values

Our core values at Open View Aluminium & Glass are professionalism, reliability and service excellence. We believe it is this approach that has earned us a loyal customer base, the respect of our peers, as well as exponential growth since our inception.

Our Vision & Mission

Our mission and vision is to deliver exceptional value to the construction industry in South Africa and Zimbabwe in particular, while expanding our footprint across Southern Africa, by providing superior quality aluminium products, supported by unrivalled service.

In order to fulfil this, we aim to continually expand on our expertise, grow in our capacity and stay at the forefront of technological and industry innovations, while growing and nurturing our team to stay on the path of professionalism and excellence.



Optional extra: Fly screen head and sill option

Optional extra: Double high rise interlock


Optional extra: Mortise lock with handle

Height - Door and Sidelights

Standard 2100mm


0 =fixed X =sliding

OX











Both width and height of the unit is 10mm smaller than sizes shown 2000 OX 2100 OX 2400 OX 2700 OX 3000 OX 2210 OXX 2660 OXX 2960 OXX 3110 3560 OXX 4010 OXX 4460 OXX 3000 OXXO 3600 OXXO 4000 OXXO 4200 OXXO 4800 OXXO 5400 OXXO 6000 OXXO

OXX

Width

1500 OX

1800 OX

4420 OXXXXO 5320 OXXXXO 5920 **OXXXXO OXXXXO** 6220 **7120** OXXXXO

SIDELIGHTS


(Also compatible with the OPENVIEW-FOLD Sliding Folding Doors.)

Unit height 10mm smaller than sizes shown. Width actual size shown.








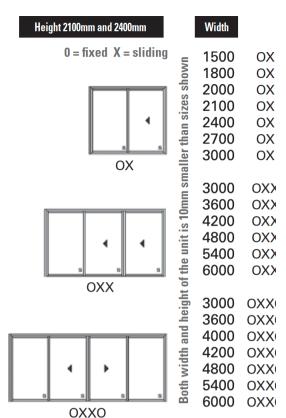




LARGE PANE DOOR



HINGE DOOR WITH MIDRAIL





Retractable Gate



SIDE LOCKING - STANDARD SIZES:

Width	Adjustment Standard 2080(h) - 2090(h)
900	(700 - 1010)
1800	(1500 - 1920)
2400	(1920 - 2460)


Custom sizes and centre locking option available on request.

SIDE LOCKING - STANDARD SIZES:


White and Bronze


SIDE LOCKING - STANDARD SIZES:

Side Locking







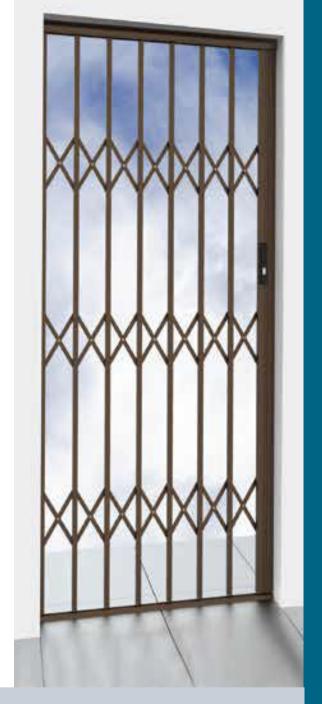

Features (Single and Double-sliding):

- Manufactured from a high strength structural grade Aluminium alloy
- Light economical Aluminium design
- Corrosion resistant
- Smooth and silent sliding action
- Instant locking on closure
- Reliable and robust components
- Sliding and fixed options available
- Low maintenance
- Quick and simple DIY installation

All transactions are subject to OpenView's standard terms and conditions which are available on request.

Products manufactured in accordance with National Building Regulations.



OPENVIEW-FOLD Sliding Folding Doors can accommodate


Door Height options


1800mm - 2100mm 2101mm - 2400mm 2401mm - 2700mm











Width

Up to 1.8m 1.8m - 2.1m 2.1m - 2.4m 2.4m - 2.7m





3.0m - 3.3m 3.3m - 3.6m 3.6m - 3.9m 3.9m - 4.2m 4.2m - 4.5m 4.5m - 4.8m 4.8m - 5.1m 5.1m - 5.4m 5.4m - 5.7m


2.4m - 2.7m 2.7m - 3.0m 3.0m - 3.3m 3.3m - 3.6m 3.6m - 3.9m 3.9m - 4.2m 4.2m - 4.5m


4.5m - 4.8m




















Standard Sill Detail (Outward Stacking) Weather Resistant

Flat Track Detail (Inward and Outward Stacking) For Internal or Covered Applications.

SILL DETAILS: OpenView Flat Track used for level floor option.





5.4m - 5.7m 5.7m - 6.0m 6.0m - 6.3m 6.3m - 6.6m

Width

3.0m - 3.3m 3.3m - 3.6m 3.6m - 3.9m 3.9m - 4.2m 4.2m - 4.5m 4.5m - 4.8m 4.8m - 5.1m 5.1m - 5.4m

5.4m - 5.7m

5.1m - 5.4m 5.4m - 5.7m 5.7m - 6.0m 6.0m - 6.3m 6.3m - 6.6m

3.3m - 3.6m 3.6m - 3.9m

3.9m - 4.2m

4.2m - 4.5m 4.5m - 4.8m 4.8m - 5.1m 5.1m - 5.4m

5.4m - 5.7m 5.7m - 6.0m 6.0m - 6.3m 6.3m - 6.6m

3.9m - 4.2m 4.2m - 4.5m 4.5m - 4.8m 4.8m - 5.1m 5.1m - 5.4m 5.4m - 5.7m

5.7m - 6.0m 6.0m - 6.3m 6.3m - 6.6m

5.1m - 5.4m

5.4m - 5.7m

5.7m - 6.0m

6.0m - 6.3m

Please note the new OpenVlew 30mm Casement Window forms part of our new econo range which uses grade 430 friction stay and econo range handles. Should your requirements need 304 friction stays or double glazing kindly refer to the OpenVlew 340 or 38 Window range or contact your nearest OpenVlew Branch.

OpenView 30 - 30mm outer frame

OpenView 340 - 34mm outer frame.

OpenView 38 - 38mm outer frame.

Burglar bars available on request.



Both width and height of the unit is 10mm smaller than sizes shown.




Can accommodate up to 20mm double glazing units for better energy saving and noise reduction.

34mm Outer frame.

Burglar bars available on request.

Both width and height of the unit is 10mm smaller than sizes shown

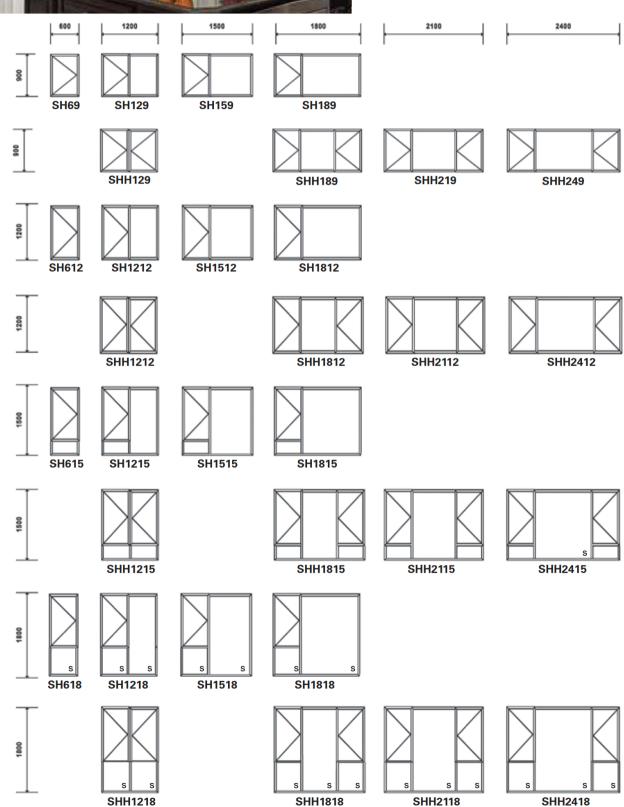

Domestic Sliding Window


Knysna Sliding Window


Salient 70 Sliding Window

Salient 90 Sliding Window

Knysna sliding windows can accommodate up to 20mm double glazing. Salient 70 sliding windows can accommodate up to 14mm double glazing and Salient 90 sliding windows can accommodate up to 24mm double glazing.



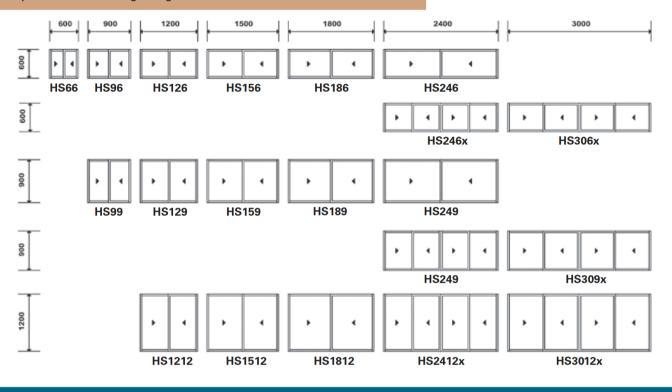

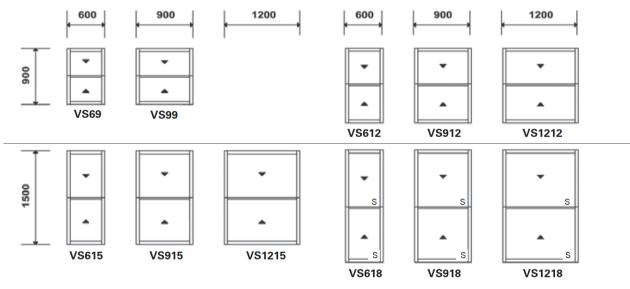

Both width and height of the Vertical and Horizontal Windows are 10mm smaller than sizes shown.





TRI DOOR



Width	Adjustment
700	(676 - 731)
750	(726 - 781)
800	(776 - 831)
850	(826 - 881)
900	(876 - 931)
950	(926 - 981)
1000	(976 - 1031)
1050	(1026 - 1081)
1100	(1076 - 1131)
1150	(1126 - 1181)
1200	(1176 -1231)



PIVOT DOOR



Width	Adjustment
600	(576 - 631)
650	(626 - 681)
700	(676 - 731)
750	(726 - 781)
800	(776 - 831)
850	(826 - 881)
900	(876 - 931)
950	(926 - 981)
1000	(976 -1031)




CORNER ENTRY



Width	Adjust	ment
800	(786 -	814)
900	(886 -	914)
1000	(986 -	1014)
1100	(1086 -	1114)



BI SLIDER




Vidth	Adi	iustment
	# N C	dotillollt

1100	(1076 - 1131)
1200	(1176 - 1231)
1300	(1276 - 1331)
1400	(1376 - 1431)



RETURN PANEL



Can be coupled to Pivot Door, Tri Door or Bi-Slider.

Width	Adjı	IS	tment
600	(576	-	608)
650	(626	-	658)
700	(676	-	708)
750	(726	-	758)
800	(776	-	808)
850	(826	-	858)
900	(876	-	908)
950	(926	-	958)
1000	(976	-	1008)



IN LINE PANEL




Width	Adjustment	
300	(284 - 316)	
400	(384 - 416)	
500	(484 - 516)	
600	(584 - 616)	

Excludes Pivot Door.



PENTA RETURN PANELS




Width	Adjustment
400	(384 - 416)
	(Sold in sets of 2)

420 (404 - 436) (Sold in sets of 2)

Excludes Pivot Door - any may be used (Standard is 700mm).

EXTENSION PROFILE





1800(h) 25mm Extension Profile

FRAMELESS SHOWER

Frameless showers are made to measure and available on request.